



Detector at 90° is outside the building on a board for calibration.

Detector is at 90° inside the building for calibration.

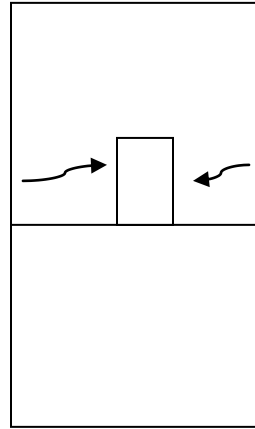

Detector at 0° will be placed inside and outside on floors 1-6.

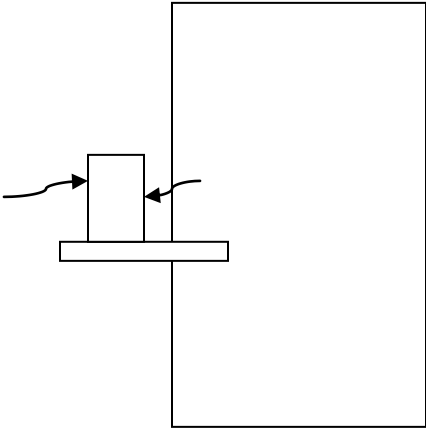